


Loc 1  
61383 40.7792 -74.1786

- INST --
- 1 - 45' YP CL2 JOINT
  - 2 - GUY, SPAN INSUL 3/8"
  - 1 - DE, SEC TPX / QPX
  - 1 - PT, 3 PH PRIMARY DEAD END ARM 13KV (POLY )
  - 1 - DE, SPACER CABLE MESS
  - 1 - SEC CABLE SUSPENSION BKT
  - 1 - XFMR, 25 KVA MAGNEX DR (120/240V)
  - 1 - XFMR, 50 KVA MAGNEX DR (120/240V)
  - 1 - ARRESTER, SURGE, 10-KV 8.40-KV
  - 1 - BRACKET, 3 PH XFMR CLUSTER
  - 1 - GROUND, EQUIPMENT

- REMV --
- 1 - CUT POLE TOP (JOINT)
  - 2 - GUY, SPAN INSUL 3/8"
  - 1 - PT, 3 PH PRIMARY DEAD END ARM 13KV (POLY )
  - 1 - SEC CABLE SUSPENSION BKT
  - 1 - BRACKET, 3 PH XFMR CLUSTER
  - 2 - REMOVE ANY XFMR

- TRAN --
- 3 - RESAG PRI
  - 1 - SHIFT SEC/NEUT
  - 2 - RESAG SVC

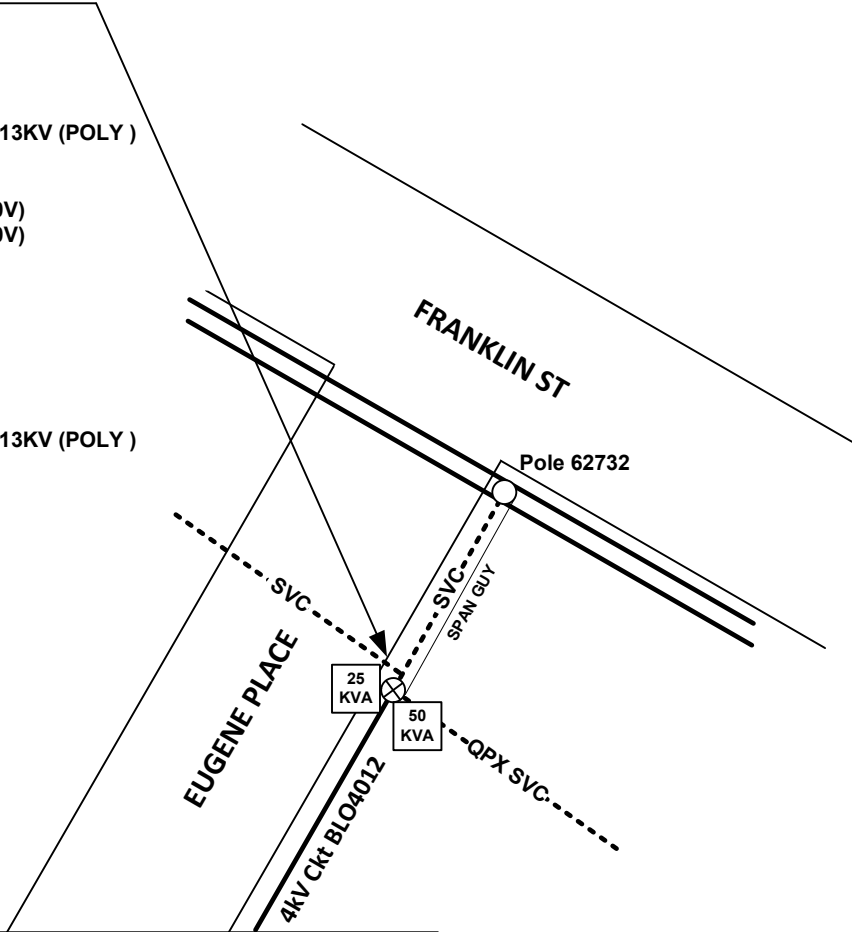

Before You Dig Call "New Jersey One Call System" for location of Underground Facilities (1-800-272-1000)

Circuits/Equipment must be field verified before construction.


COID 126943

LEGEND					
Replace Pole	⊗	Solid Blade	⊗	Spur	○→
Existing Pole	○	Switch 600/900	⊖	Cap Bank	⊥
Guy & Anchor	↗	1 PH Riser	U.G. ← OH.	Street Light	⊗
SPAN/STUB GUY		3 PH Riser	U.G. ← OH.	Area Light	⊗
Transformer	50 KVA	3 Phase Primary		—————	
		2 Phase Primary		- - - - -	
Fused Cut Out	40	1 Phase Primary		- - - - -	
		Secondary / Service		· · · · ·	

**DEFECTIVE POLE REPLACEMENT PROJECT**

---

**POLE 61383  
EUGENE PLACE, BELLEVILLE**



**ORDER # 300650985**

<b>DATE</b>	<b>9/20/12</b>
<b>SCALE</b>	<b>N/A</b>
DIVISION	CENTRAL
PROJECT #	RD-1
CIRCUIT	BLO4012
VOLTAGE	4kV
<b>MAP 648</b>	
DRAWN	E. Busse
SHEET	1 OF 1

## ORDER # 300650985

Qty	Stock Code	Description
1	W002030	XFMR - 25 KVA MagneX DR (120/240V)
1	W002060	XFMR - 50 KVA MagneX DR (120/240V)
3	W011703	3/4" Iron Pipe (per foot)
10	W026104	Wire, Tap #4 CU 600V Covered (Per Foot)
30	W026113	2/0 CU 600V Covered Secondary Lead (Per Foot)
60	W031124	Wire, #4 Ground Wire (Per Foot)
30	W031840	Wire, Primary Tap #4 Copper (Per Foot)
400	W035004	Strand, GUY/Mess 3/8" (Per Foot)
1	W040307	Pole - 45' CL2 (CCA)
4	W061119	Bolt - 1/2" x 7"
6	W061209	Bolt, 5/8" X 2 1/2"
1	W061226	Bolt, Machine 5/8" X 12"
6	W061228	Bolt, Machine 5/8" X 14"
3	W061234	Bolt, Machine 5/8" X 20"
7	W061328	Bolt, Machine 3/4" X 14"
4	W065503	Nail
45	W067702	Staples - 1/2"
4	W069005	Washer - 9/16" Round
1	W069007	Washer - 5/8" Round
19	W069024	Washer - 2 1/4" Square
6	W069028	Washer, 4" x 4" x 1/4" Curved
4	W069043	Washer, 9/16 Coil Spring
8	W069045	Washer, 5/8" Coil Spring
5	W069047	Washer, 3/4 Dbl Coil Spring
2	W069052	Washer, Lock Galvanized 3/4"
2	W070222	X-Arm 8"
2	W070721	Brace, X-Arm Wood 60", 18 Inch Drop (Pair)
1	W070844	Bracket - 3 PH XFMR Cluster (Limit 1500 Lbs per XFMR)
1	W071207	Clamp, Sec Cable Suspension
1	W071247	Conn - Gr Rod Clamp 5/8" Rod to #4/#6 CU Cond
1	W071285	Conn - Mid Span SVC Clamp
1	W071740	Reference Gain Disk
4	W072202	Bolt Eye 5/8" (D-Ring)
5	W072215	Thimble Eye - 3/4" (Threaded)
2	W073360	Performed SVC Grip #2 AAAC
1	W073363	Performed SVC Grip 2/0 AL
4	W073384	Guy - Grip 3/8"
1	W073391	Dead End - AAC & AWAC For #2 - 4/3
1	W074409	Phase Identification Marker - Yellow
45	W074830	Molding - Plastic 1/2"
1	W076652	Ground Rod 5/8" Terminal Sections
3	W092051	Dead End - Auto Rigid Double Bail 397.5 KCMIL AL
3	W094010	Insul-Primary Poly Dead End 13KV
2	W094301	Insul, 78" Glass Rod
1	W130156	Arrester, Surge 10-KV 8.40-KV
3	W160476	Burndy Wedge Shell - Yellow
3	W160489	Burndy Wedge WCY - 49
3	W160502	Burndy Wedge Cover - Med
8	W162570	Bolted 2/0 Line/#6-#2 Tap (Covered-4 Tap)
8	W162575	Bolted 2/0-4/0 Line/2/0-4/0 Tap (Covered-4 Tap)
6	W162620	Conn - Ground Wire "L" Type
2	W166009	Conn, Compression Splice for Ground Wire
1	W172941	Pole Tag - Holder 10"
1	W178494	Pole Tag Letter, B
1	W178514	Pole Tag Letter, V
1	W178520	Pole Tag Number, 1
2	W178522	Pole Tag Number, 3
1	W178525	Pole Tag Number, 6
1	W178527	Pole Tag Number, 8